



DC to AC Power Inverters 2000W / 3000W

- Premium DC pure sine inverters
- Features Powesave Mode
- Innovative, compact design
- Use with DC Install Kits


The power solution for:

- RVs / Campers
- Mobile Office
- Long Haul Trucks
- Utility Vehicles/ Work Trucks
- Boats

The Superior Power of Sine Wave

Go Power!™ is the ultimate choice for powering almost any electronic equipment or appliances that require an exact replica of AC power. Two GFCI-equipped outlets provide a safe and convenient connection for reliable access to pure interference-free power, or optionally you can harwire the inverter to a load center. Go Power! pure sine wave inverters are ideal for running any load within their wattage range.

- **Kitchen Appliances** - coffee makers, blenders, microwaves and refrigerators
- **Utility Truck Equipment** - Power tools, battery chargers, test equipment
- **Office Equipment** - computers, printers, fax machines and monitors
- **Consumer Electronics** - TVs, music systems, lighting, fans, DVD players and satellite dishes

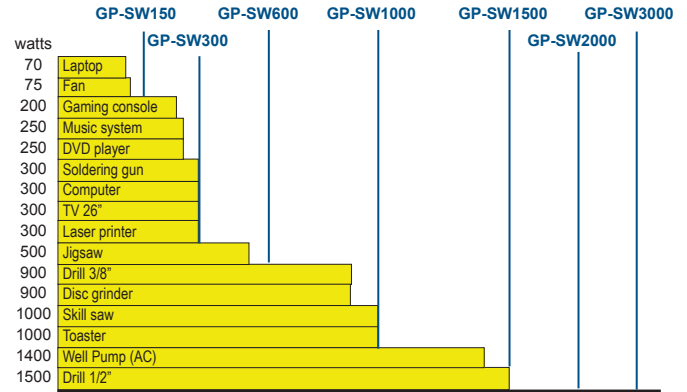

SPECIFICATIONS*	GP-SW2000-12 (12V)	GP-SW2000-24 (24V)	GP-SW3000-12 (12V)	GP-SW1500-24 (24V)
Continuous Output Power	2000W	2000W	3000W	3000W
Surge Rating	4000W	4000W	6000W	6000W
Output Waveform	Pure Sine Wave		Pure Sine Wave	
Output Voltage ± 3%	115 VAC RMS		115 VAC RMS	
Input Voltage	10.5 - 15 VDC	21.0 - 30.0 VDC	10.5 - 15 VDC	21 - 30 VDC
Efficiency	85 - 92%	85 - 92 %	85 - 90%	85 - 90%
No Load Current Draw / Powersave	2.8A / 0.6A	1.5A / 0.3A	2.0A / 0.55A	1.6 A / 0.35A
Protection	Overload, Short Circuit, Reverse Polarity (Fuse), Over/Under Input voltage, Over Temperature			
Low Battery Alarm ± 2%	10.5V - 10V	21 V - 20.5V	10.5V - 10V	21V - 20.5V
Low Battery Shut-Down ± 2%	10V	20V	10V	21V
Operating Temperature Range	0 - 40°C / 32°F - 104°F		0 - 40°C / 32°F - 104°F	
Storage Temperature Range	-30°C - 70°C / -22°F - 158°F		-30°C - 70°C / -22°F - 158°F	
Cooling	Thermostatically Controlled Fan		Thermostatically Controlled Fan	
AC Receptacle	Dual GFCI		Dual GFCI	
Remote Port Option	Yes		Yes	
Dimensions (L x W x H) in mm	422 x 208 x 166	422 x 208 x 166	452 x 208 x 166	452 x 208 x 166
Dimensions (L x W x H) in inches	16.6 x 8.2 x 6.5	16.6 x 8.2 x 6.5	17.8 x 8.2 x 6.5	17.8 x 8.2 x 6.5
Weight	9.5 kg / 21 lbs	9.5 kg / 21 lbs	9.8 kg / 22 lbs	9.8 kg / 22 lbs
Warranty	2 Years		2 Years	
Inverter Install Kits	GP-DC-KIT4	GP-DC-KIT3	GP-DC-KIT5	GP-DC-KIT3
Remotes (Optional)	GP-SWR-B-12 / GP-SWR-A	GP-SWR-B-24 / GP-SWR-A	GP-SWR-B-12 / GP-SWR-A	GP-SWR-B-24 / GP-SWR-A
UPC	8-39085-00068-7	8-39085-00069-4	8-39085-00070-0	8-39085-00071-7

*Specifications subject to change without notice

The POWER to GO anywhere!